

Assembly Instruction Sheet #IS-1725W36-2-101-A For Style 1725W36-2-101-A

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.


Light Source: 120V LED *16W DIMMABLE (2700K 3000K 3500K 4000K 5000K) .

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents



[A] Fixture Body x1

[1] M4 X12L screw 5PC



[B] glass x2

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Screw	2pcs



STEP 1 - Put the glass into the lamp body and secure it with screws.

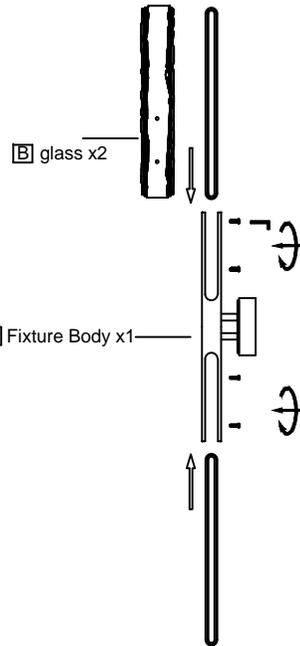


Figure 1

STEP 2 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.

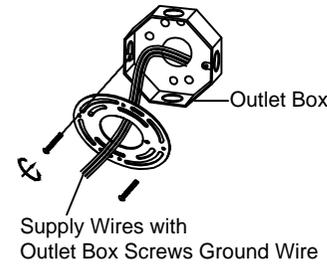


Figure 2

STEP 4 Adjust the effect of the required light (2700K 3000K 3500K 4000K 5000K).

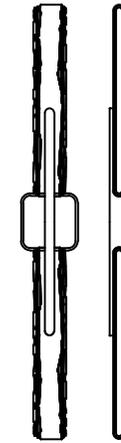


Figure 4

Note: The switch is hidden inside the box.

STEP 3 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

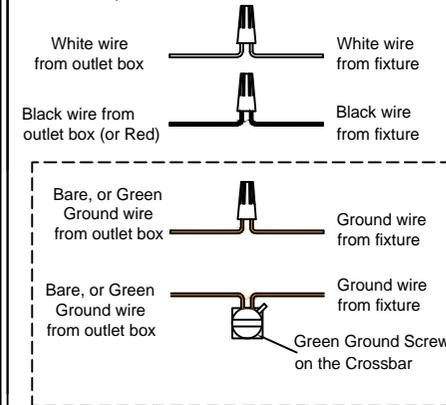


Figure 3

STEP 5 Install fixture into the wall.

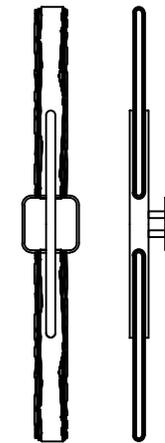


Figure 5

Caution: After installation, seal around the canopy using outdoor-rated silicone sealant. Waterproofing is essential !

WALL